


EMTEK Keyed Function Installation Guide

1. Thread Drive Bar Cylinder


Use <u>Cylinder Key</u> to thread Drive Bar Cylinder clockwise on interior side of door.

Inside




Note: Notches on cylinder must be parallel with the horizontal plane when screwed flush into lock body.

2. Install Lock Body



specifications

3. Install Outside Plate and Thread Key Cylinder




TRIMS VARY NARROW OVAL SHOWN

Install Key Cylinder by threading it clockwise onto lock body plate.

Note: Key Cylinder notches must be parallel with the horizontal plane when fully screwed into lock body.


4. Tighten Key Cylinder

Tighten locking screw to engage notches on cylinder




5. Mount Inside Plate






6. Install Trim Plate



Door Jamb Prep.




See template for door jamb prep specifications




Use <u>Cylinder Key</u> to thread Drive Bar Cylinder clockwise on interior side of door.

Inside




Note: Notches on cylinder must be parallel with the horizontal plane when screwed flush into lock body.

2. Install Lock Body




specifications



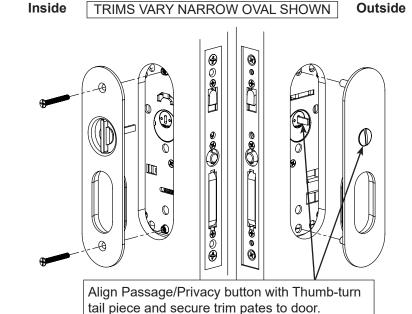


4. Tighten Drive Bar Cylinder


Tighten locking screw to engage notches on cylinder



5. Install Trim Plate



Door Jamb Prep.



See template for door jamb prep specifications

