

WILSHIRE SIDEPLATE - NON KEYED  
8135

DOOR THICKNESS SPECIFICATIONS

Standard Door Thickness: 1-1/4" to 1-3/4"

Standard Components:

- Inside Passage Half Spindle
- 1" Wood Screws
- Threaded Tubes & Machine Screws

Supplied upon request for Hollow-Core Doors

- Full-Lip Strike Plate


Extended Door Thickness: 1-3/4" to 2-1/4"

Extended Components:

- Long Inside Passage Half Spindle
- 1" Wood Screws
- Threaded Tubes & Machine Screws

Supplied upon request for Hollow-Core Doors

- 2-1/2" Deadbolt Mounting Screws
- Extended Full-Lip Strike Plate

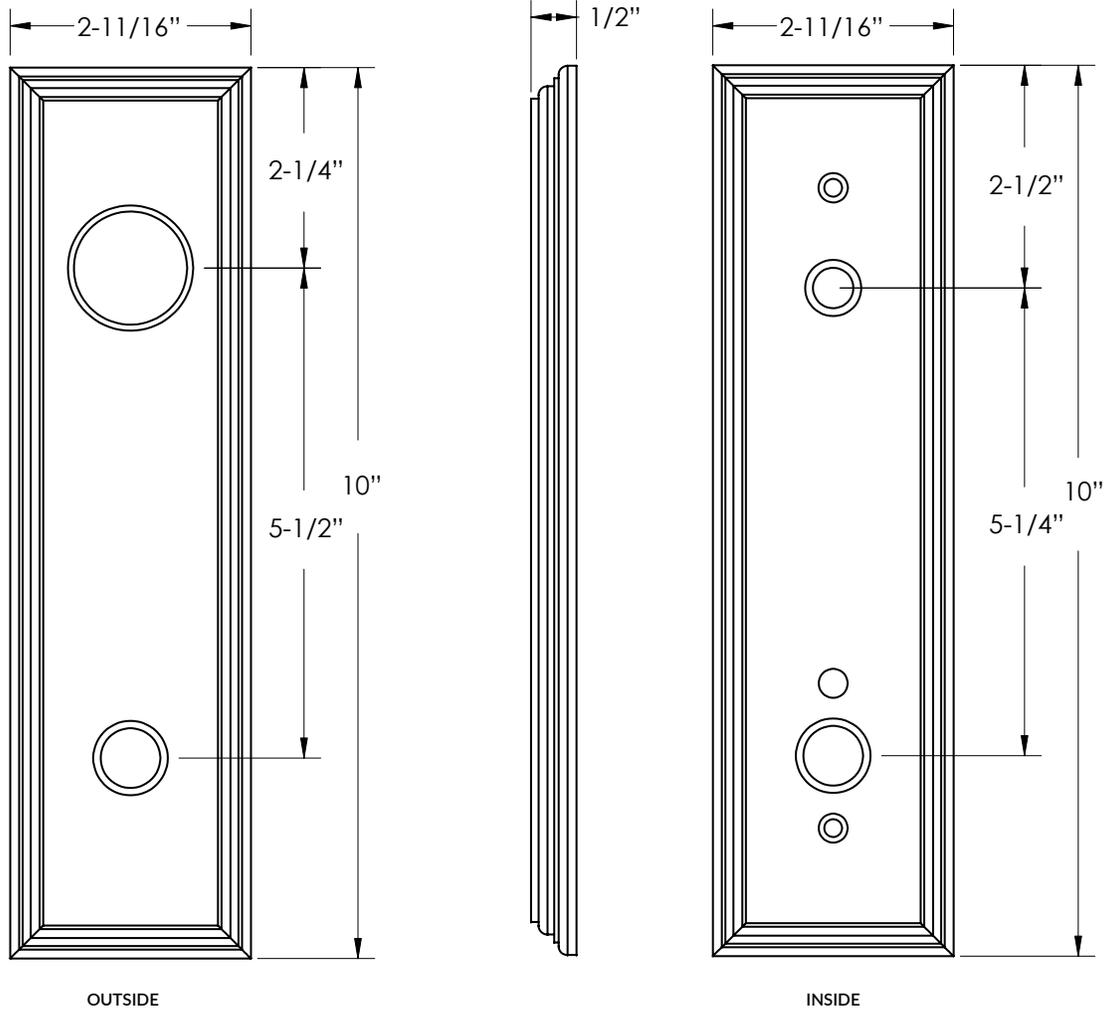

WILSHIRE SIDEPLATE - KEYED  
8821

DOOR THICKNESS SPECIFICATIONS

Standard Door Thickness: 1-1/4" to 1-3/4"

Standard Components:

- Inside Passage Half Spindle
- 1" Wood Screws
- Threaded Tubes & Machine Screws

Supplied upon request for Hollow-Core Doors

- Full-Lip Strike Plate

Extended Door Thickness: 1-3/4" to 2-1/4"

Extended Components:

- Long Inside Passage Half Spindle
- 1" Wood Screws
- Threaded Tubes & Machine Screws

Supplied upon request for Hollow-Core Doors

- 2-1/2" Deadbolt Mounting Screws
- Extended Full-Lip Strike Plate