

Thru-Bolt Mount with Decorative Caps



How To Order:


86442 US19
 Product Code Finish

Appliance/Door pulls are drilled and tapped for 3/8"-16 thread to accommodate thread adapters. Fits standard door thickness of 1 3/4". Specify if thicker.

Supplied with:

- Two- Thread adapters for 1/4 -20 thread
- Two- 1/4 -20 Flat head machine screws x 1" long
- Two- Thread adapters for 10-32 thread
- Two- 10-32 Flat head machine screws x 1" long
- Two- 10-32 Flat head machine screws x 2" long
- Two- Threaded Washers
- Two- Decorative Caps

Concealed Surface Mount (CS)

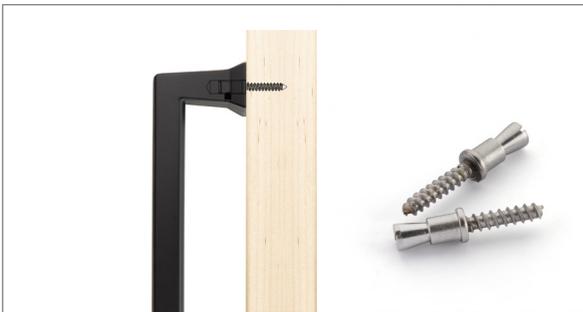

How To Order:


CS 86442 US19
 Concealed Surface Mount Product Code Finish

Most standard appliance pulls and door pulls are available with Concealed Surface mounting. Fits minimum door thickness of 1 1/4".

Supplied with:

- One grip with 3/8" diameter hole in the stem
- Two- #10, 1" bevel head wood screws
- Two- 1-32 set screws

Back to Back Mount (BTB)

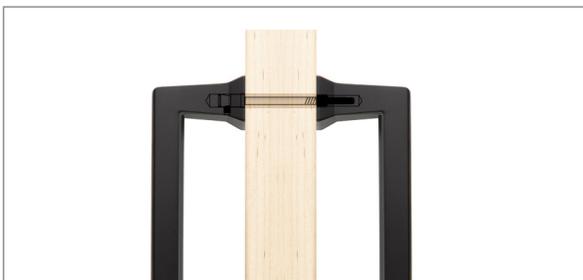

How To Order:

BTB 86442 US19
 Back to Back Mount Product Code Finish

Most standard appliance pulls and door pulls are available with Back to Back mounting. Fits standard door thickness of 1 3/4". Specify if thicker.

Supplied with:

- One grip with 10-32 threads in the stem
- One mating grip with 3/8" diameter hole in the stem
- Two- 3/8" diameter bevel head screws with 10-32 shaft by 2 1/2" long
- Two- 10-32 set screws