





2 3/8" (60mm) minimum backset required

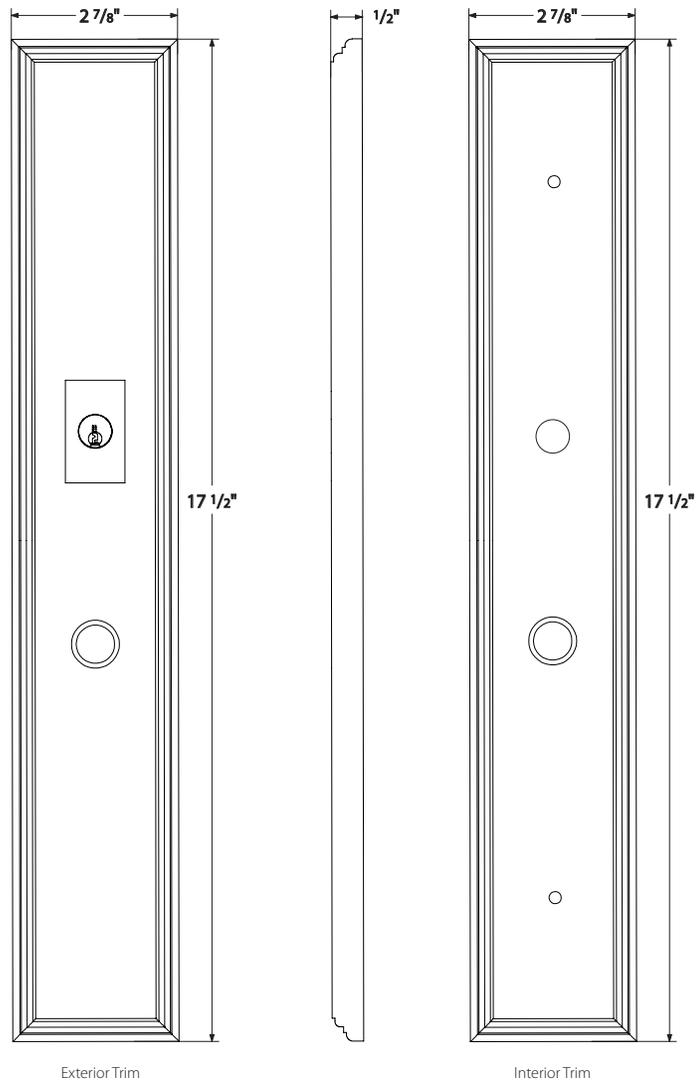

2 3/8" (60mm) minimum backset required

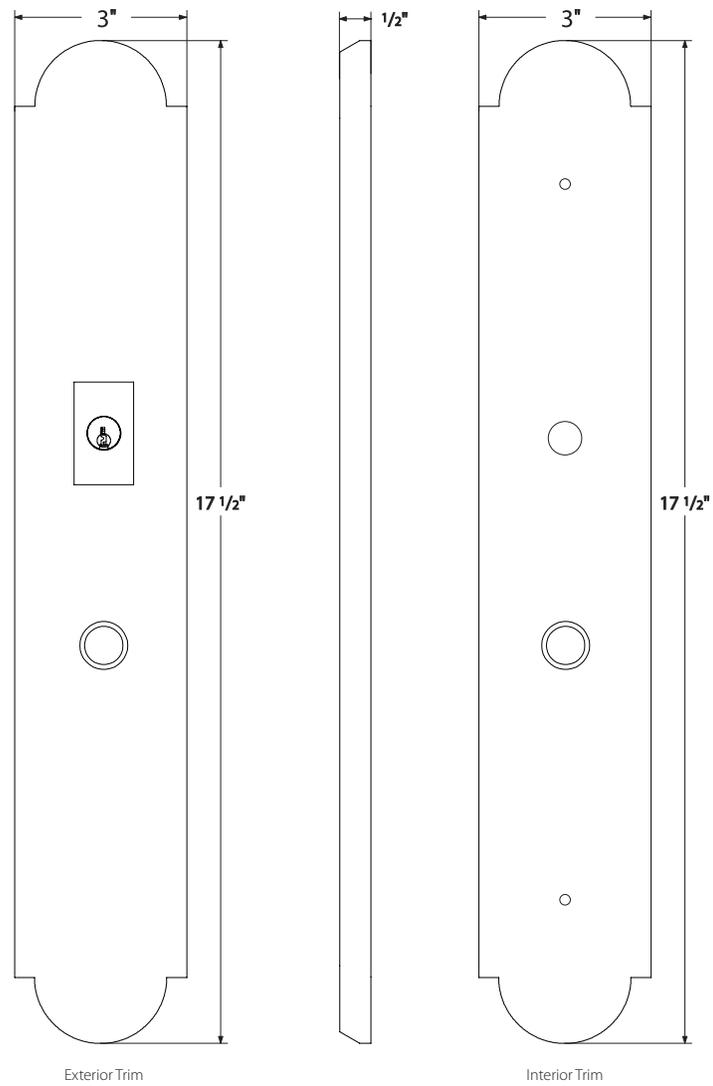

2 3/8" (60mm) minimum backset required

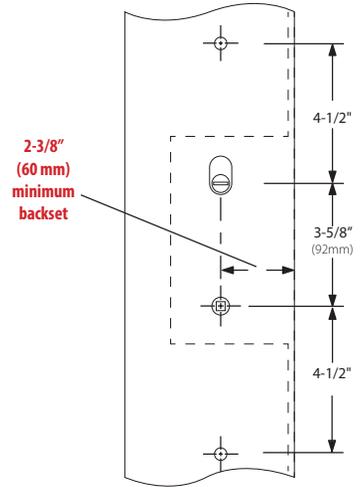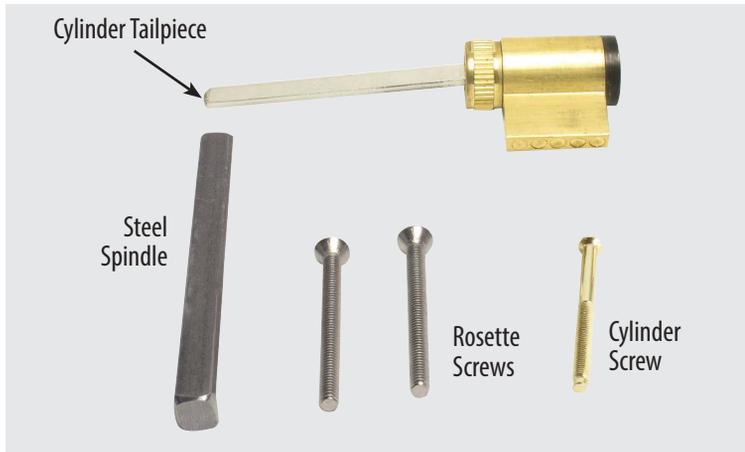

Keyed Plates with American Cylinder Includes non-keyed thumbturn inside

Standard Door Thickness: from 1 5/8" to 2"
Standard Components: • Single Cylinder Tailpiece • 4 1/2" Steel Spindle • 2" Rosette Screws

Extended Door Thickness: Over 2" to 2 3/8"
Extended Components: • Long Single Cylinder Tailpiece • 5" Steel Spindle • 2 1/2" Rosette Screws • 3" Cylinder Screw


Non-Keyed Plates Includes non-keyed passage, fixed handle out/operating handle in, and dummy (uses screws only)

Standard Door Thickness: from 1 5/8" to 2"
Standard Components: • Thumbturn Tailpiece • 3 3/4" Steel Spindle (half-spindle for fixed handle out/operating handle in) • 2" Rosette Screws • 1 1/2" Rosette Screws for 1 5/8" thick door


Extended Door Thickness: Over 2" to 2 3/8"
Extended Components: • Long Thumbturn Tailpiece • 4 1/2" Steel Spindle (half-spindle for fixed handle out/operating handle in) • 2 1/2" Rosette Screws • 2" Rosette Screws for 2" - 2 1/8" thick door

CONSTRUCTION KEYING

- Lost ball system.
- Last four pin locations drilled for lost ball application.
- Master key pins used for code variability.
- Construction keys and owner keys sent separately.
- Order by indicating "Construction Keyed, House #_" next to applicable locks.



- Construction devices used on one or more of last four positions.



- Dimples drilled in plug in this position.

Charge for Construction Keying - \$3.00 (NET)
• Locks that are both construction keyed and keyed alike in a house group will be charged a total of \$5.00 (NET) per cylinder.

Charge for Re-Keying - \$2.00 (NET) per Cylinder
• Locks that are keyed to code or keyed alike in a house group will be charged \$2.00 (NET) per cylinder.


Keying to Code
• Order by indicating "Key Code XXXXX" next to applicable locks.

Keying Alike
• Order by indicating "Keyed Alike" next to applicable locks if only one keyed alike group is wanted.
• If ordering multiple groups (houses) indicate "Keyed Alike House #_" next to applicable locks.


LARGE MULTI POINT ENTRY SETS Specification Sheet for Components and Door Thickness

Keyed with American Cylinder (for Active Door, Schlage® Keyway Standard, Weiser® Keyway Optional, Rekeyable)

American Cylinder **Above** Handle

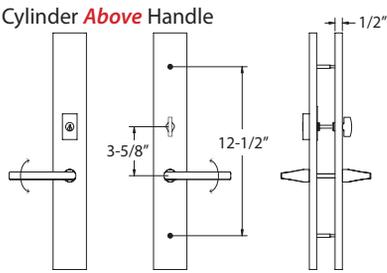


American Cylinder **Below** Handle


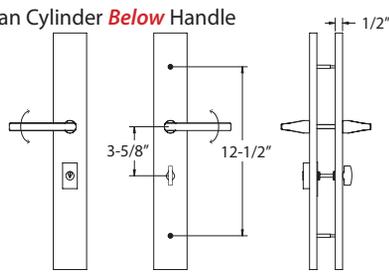


Non-Keyed with Cylinder Plugs, Passage (for Semi-Active Door)

American Cylinder **Above** Handle

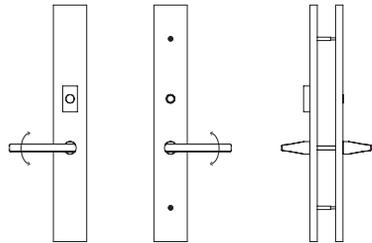


American Cylinder **Below** Handle

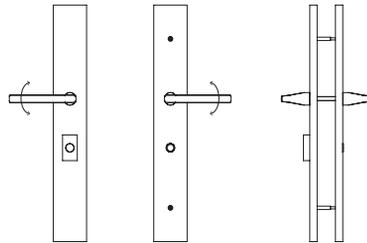


Non-Keyed with Cylinder Plug, American Style Thumbturn Inside (for Active Door)

American Cylinder **Above** Handle

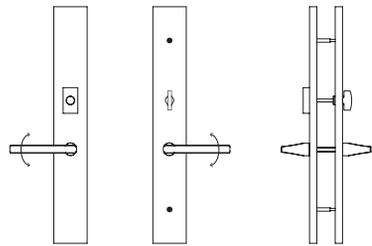


American Cylinder **Below** Handle

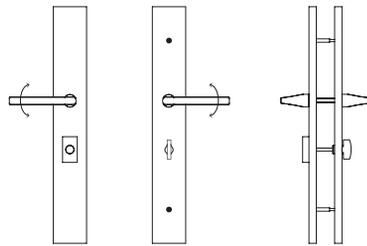


Non-Keyed with Cylinder Plugs, Fixed Handle Outside, Operating Handle Inside (for Semi-Active Door)

American Cylinder **Above** Handle

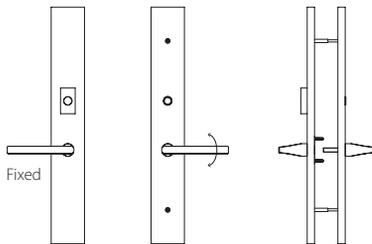


American Cylinder **Below** Handle

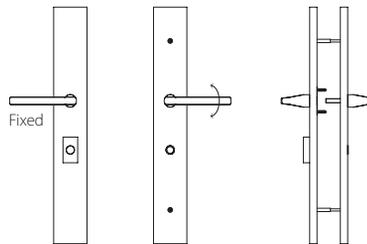



Dummy Pair with Cylinder Plugs (for Non-Active Door)

American Cylinder **Above** Handle

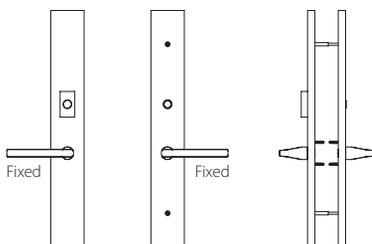


American Cylinder **Below** Handle

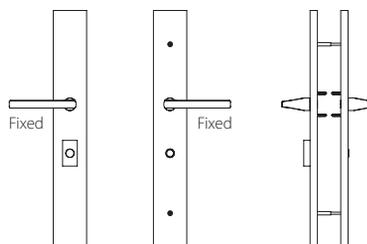


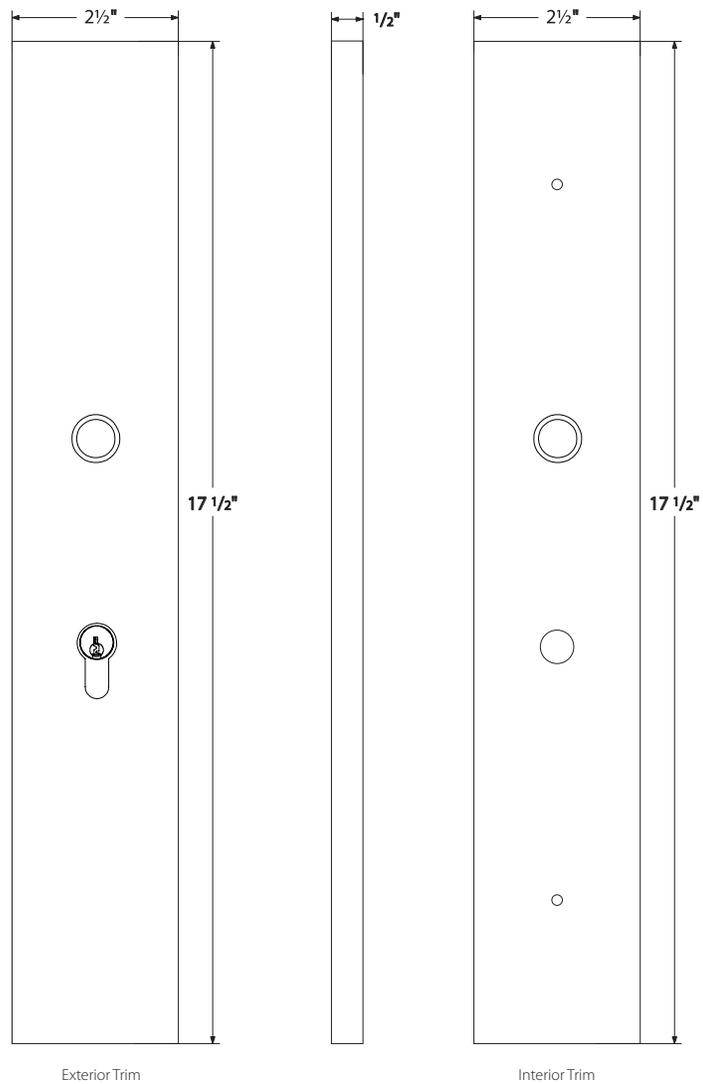

2 3/8" (60mm) minimum backset required


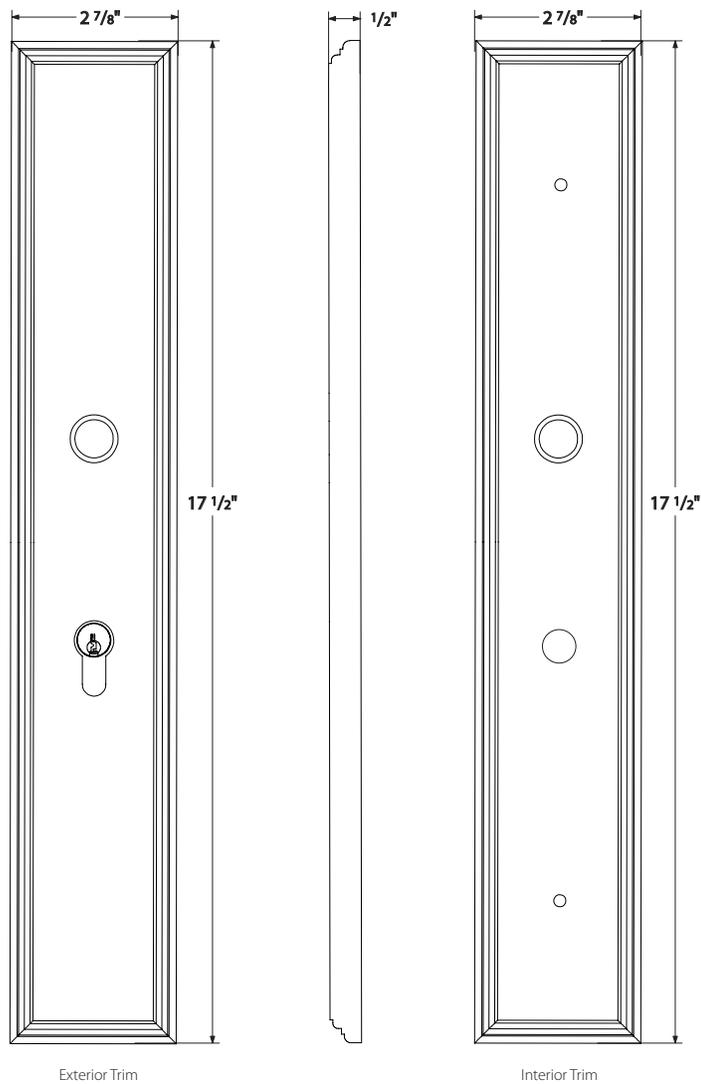


2 3/8" (60mm) minimum backset required

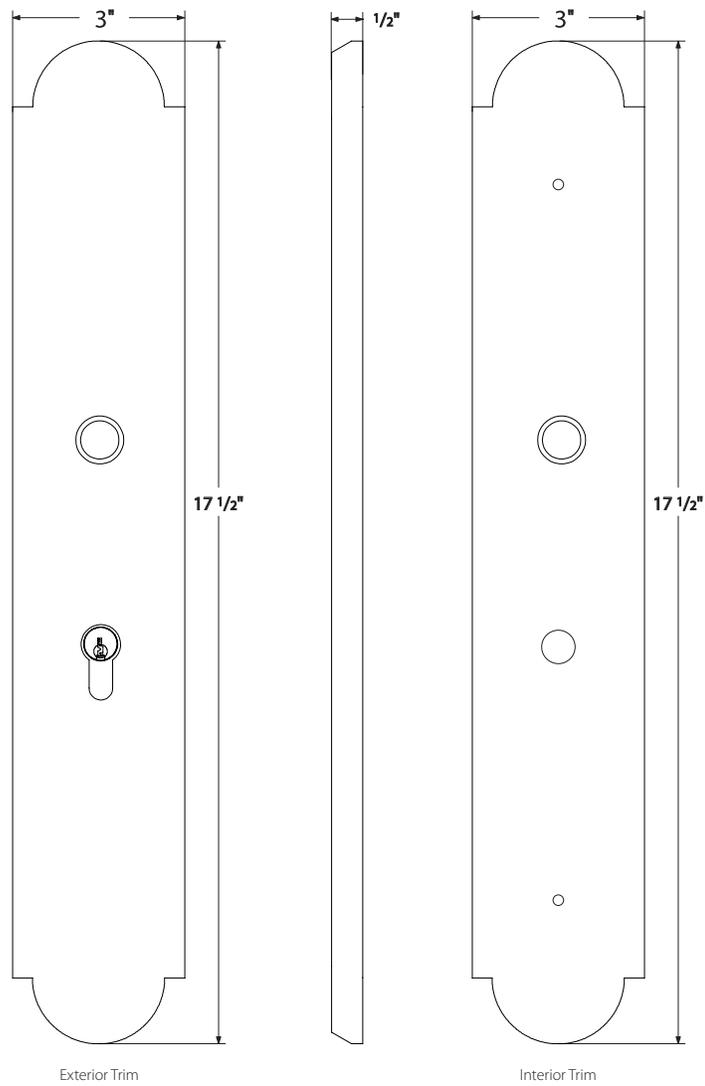

2 3/8" (60mm) minimum backset required

LARGE MULTI POINT ENTRY SETS Specification Sheet for Components and Door Thickness

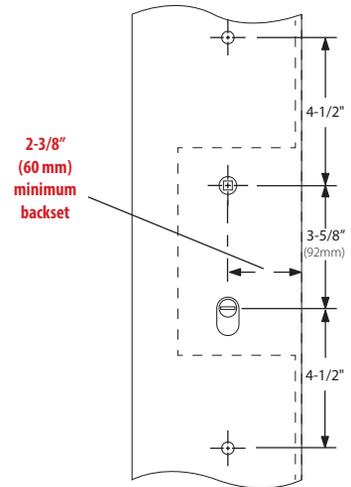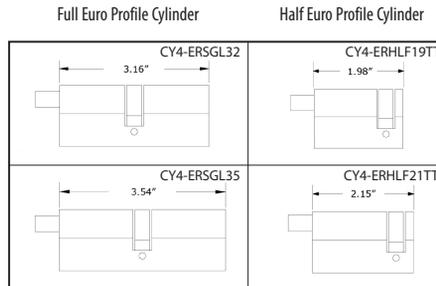

Keyed Plates with Euro Profile Cylinder

Standard Door Thickness: from 1 5/8" to 2"

- 3 5/32" (3.16") Euro Profile Cylinder
- 4 1/2" Steel Spindle
- 2" Rosette Screws

Extended Door Thickness: Over 2" to 2 3/8"

- 3 17/32" (3.54") Euro Profile Cylinder
- 5" Steel Spindle
- 2 1/2" & 3" Screws

Non-Keyed Plates with Euro Profile Half Cylinder

Standard Door Thickness: from 1 5/8" to 2"

- 1 3/32" (1.98") Euro Profile Cylinder
- 4 1/2" Steel Spindle
- 2" Rosette Screws

Extended Door Thickness: Over 2" to 2 3/8"

- 2 3/32" (2.15") Euro Profile Cylinder
- 5" Steel Spindle
- 2 1/2" & 3" Screws

Non-Keyed Plates Includes non-keyed passage, fixed handle out/operating handle in, and dummy (uses screws only)

Standard Door Thickness: from 1 5/8" to 2"

- 3 3/4" Steel Spindle (half-spindle for fixed handle out/operating handle in)
- 2" Rosette Screws
- 1 1/2" Rosette Screws for 1 5/8" thick door

Extended Door Thickness: Over 2" to 2 3/8"

- 4 1/2" Steel Spindle (half-spindle for fixed handle out/operating handle in)
- 2 1/2" Rosette Screws
- 2" Rosette Screws for 2" - 2 1/8" thick door

CUSTOM KEYING

Charge for Re-Keying - \$2.00 (NET) per Cylinder

- Locks that are keyed to code or keyed alike in a house group will be charged \$2.00 (NET) per cylinder.

Keying to Code


- Order by indicating "Key Code XXXXX" next to applicable locks.

Keying Alike

- Order by indicating "Keyed Alike" next to applicable locks if only one keyed alike group is wanted.
- If ordering multiple groups (houses) indicate "Keyed Alike House #_" next to applicable locks.



Keyed with Euro Profile Cylinder (for Active Door, Schlage® Keyway Standard, Rekeyable)

Euro Cylinder *Below* Handle

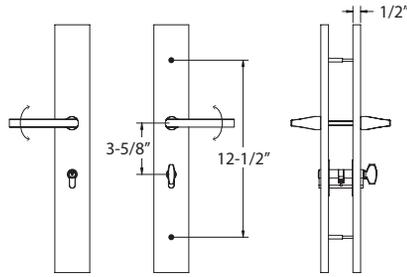


Non-Keyed with Cylinder Plugs, Passage (for Semi-Active Door)

Euro Cylinder *Below* Handle

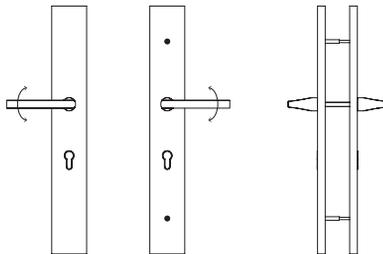


Non-Keyed with Cylinder Plug, Euro Profile Style Thumbturn Inside (for Active Door)

Euro Cylinder *Below* Handle

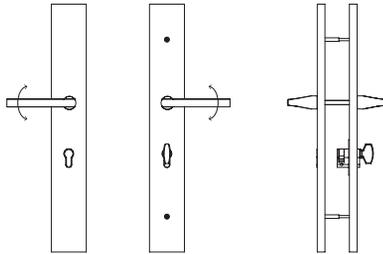

Non-Keyed with Cylinder Plugs, Fixed Handle Outside, Operating Handle Inside (for Semi-Active Door)

Euro Cylinder *Below* Handle

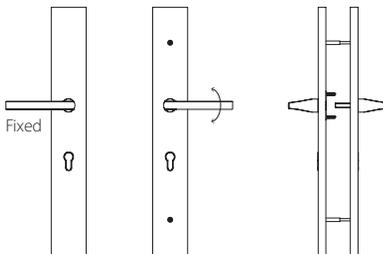

Dummy Pair with Cylinder Plugs (for Non-Active Door)

Euro Cylinder *Below* Handle

