


### Specification Sheet for Trim and Cylinder Styles LARGE MULTI POINT ENTRY SETS

2-3/8" (60 mm) minimum

backset



Keyed Plates with American Cylinder Includes non-keyed thumbturn inside

| Standard Door Thickness: 1%" to 1¾"  | Extended Door Thickness: Over 1¾" to 2¾"  | Extended Door Thickness: Over 2¾" to 3"   |
|--|---|---|
| <ul> <li>Single cylinder tailpiece</li> <li>3 ¾" Steel spindle</li> <li>2" Rosette screws</li> </ul> | <ul> <li>Long single cylinder tailpiece for 1 <sup>7</sup>/<sub>8</sub>" - 2 <sup>1</sup>/<sub>4</sub>" thick door</li> <li>Extra long single cylinder tailpiece for 2 <sup>3</sup>/<sub>8</sub>" thick door</li> <li>4 <sup>1</sup>/<sub>2</sub>" Steel spindle</li> <li>2" Rosette screws for 1 <sup>7</sup>/<sub>8</sub>" - 2" thick door</li> <li>2 <sup>1</sup>/<sub>2</sub>" Rosette screws for 2 <sup>1</sup>/<sub>8</sub>" - 2 <sup>3</sup>/<sub>8</sub>" thick door</li> </ul> | <ul> <li>Extra long single cylinder tailpiece</li> <li>5" Steel spindle</li> <li>2 ½" Rosette screws for 2 ½" thick door</li> <li>3" Rosette screws for 2 %" - 3" thick door</li> </ul> |

Non-Keyed Plates Includes non-keyed passage, fixed handle out/operating handle in, and dummy (uses screws only)


| Standard Door Thickness: 1 <sup>5</sup> / <sub>8</sub> " to 1 <sup>3</sup> / <sub>4</sub> "  | Extended Door Thickness: Over 1¾" to 2¾"  | Extended Door Thickness: Over 2 <sup>3</sup> / <sub>8</sub> " to 3"  |
|--|---|--|
| <ul> <li>Thumbturn tailpiece</li> <li>3 ¾" Steel spindle</li> <li>2" Half spindle for fixed handle out/operating handle in</li> <li>2" Rosette screws</li> </ul> | <ul> <li>Long Thumbturn tailpiece for 1 <sup>7</sup>/<sub>8</sub>" - 2 <sup>1</sup>/<sub>4</sub>" thick door</li> <li>Extra long thumbturn tailpiece for 2 <sup>3</sup>/<sub>8</sub>" thick door</li> <li>4 <sup>1</sup>/<sub>2</sub>" Steel spindle</li> <li>2" Half spindle for fixed handle out/operating handle in</li> <li>2" Rosette screws for 1 <sup>7</sup>/<sub>8</sub>" - 2" thick door</li> <li>2 <sup>1</sup>/<sub>2</sub>" Rosette screws for 2 <sup>1</sup>/<sub>8</sub>" - 2 <sup>3</sup>/<sub>8</sub>" thick door</li> </ul> | <ul> <li>Extra long thumbturn tailpiece</li> <li>5" Steel spindle</li> <li>2 ½" Half spindle for fixed handle out/operating handle in</li> <li>2 ½" Rosette screws for 2 ½" thick door</li> <li>3" Rosette screws for 2 5%" - 3" thick door</li> </ul> |

#### Charge for Re-Keying - \$3 (NET) per cylinder

- Keying to Code
- Order by indicating "Key Code XXXXX " next to applicable locks
- Keying Alike
- Order by indicating "Keyed Alike" next to applicable locks if only one keyed alike group is wanted
- If ordering multiple groups (houses) indicate "Keyed Alike House #\_" next to applicable locks

#### Charge for Construction Keying - \$4 (NET) per cylinder

- Locks that are both construction keyed and keyed alike in a house group will be charged a total of \$7 (NET) per cylinder
- Lost ball system
- · Last four pin locations drilled for lost ball application
- Master key pins used for code variability
- Construction keys and owner keys sent separately
- Order by indicating "Construction Keyed, House #\_" next to applicable locks






4-1/2


3-5/8


4-1/2

Construction devices used on one or more of last four positions

Dimples drilled in plug in this position

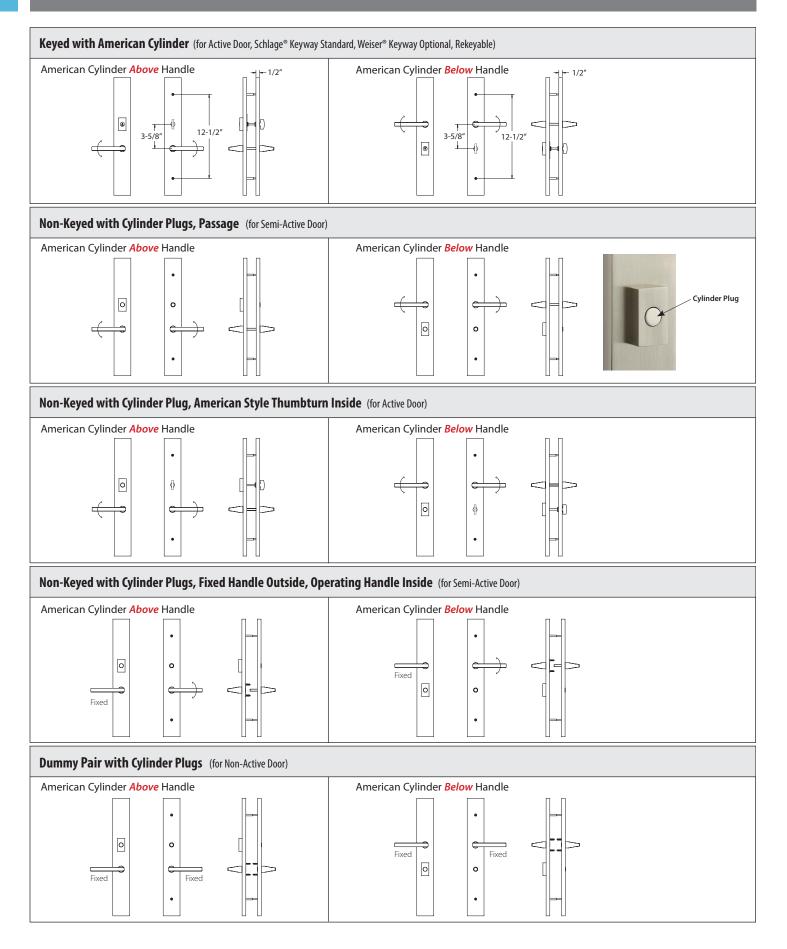

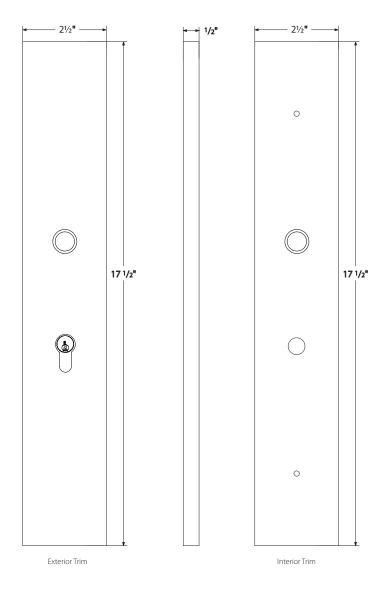

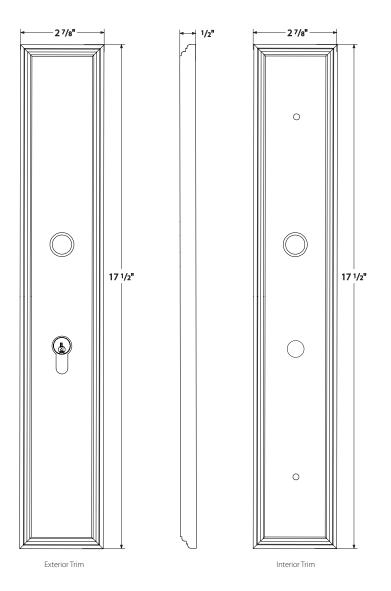

2<sup>3</sup>/<sub>8</sub>" (60mm) minimum backset required

EMTEK.


3" -1/2" 3" -0 17 1/2" 17 1/2" 0 Exterior Trim Interior Trim

### 2<sup>3</sup>/<sub>8</sub>" (60mm) minimum backset required

EMTEK.

## LARGE MULTI POINT ENTRY SETS Specification Sheet for Components and Door Thickness



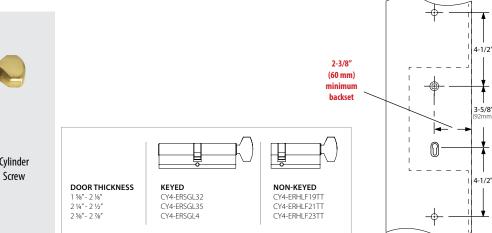

#### **Keyed Plates with Euro Profile Cylinder**

| Standard Door Thickness: 1 <sup>5</sup> / <sub>8</sub> " to 1 <sup>3</sup> / <sub>4</sub> "  | Extended Door Thickness: Over 1¾" to 2¾"   | Extended Door Thickness: Over 2¾" to 2½"  |
|--|--|---|
| <ul> <li>3 <sup>3</sup>/<sub>22</sub>" Euro profile cylinder</li> <li>3 <sup>3</sup>/<sub>4</sub>" Steel spindle</li> <li>2" Rosette screws</li> </ul> | <ul> <li>3 ½2" Euro profile cylinder for 1 ½" - 2 ½" thick door</li> <li>3 ½2" Euro profile cylinder for 2 ¼" - 2 ½" thick door</li> <li>4 ½" Steel spindle</li> <li>2" Rosette screws for 1 ½" - 2 ½" thick door</li> <li>2 ½" Rosette screws for 2 ½" - 2 ½" thick door</li> </ul> | <ul> <li>3 <sup>17</sup>/<sub>32</sub>" Euro profile cylinder for 2 ½" thick door</li> <li>4" Euro profile cylinder for 2 5%" - 2 7%" thick door</li> <li>5" Steel spindle</li> <li>2 ½" Rosette screws for 2 ½" thick door</li> <li>3" Rosette screws for 2 5%" - 3" thick door</li> </ul> |

Non-Keyed Plates Includes non-keyed passage, fixed handle out/operating handle in, and dummy (uses screws only)

| Standard Door Thickness: 15%" to 134"  | Extended Door Thickness: Over 1¾" to 2¾"   | Extended Door Thickness: Over 23/8" to 27/8"  |
|--|--|---|
| <ul> <li>1 <sup>3</sup>/<sub>52</sub>" Euro profile cylinder</li> <li>3 <sup>3</sup>/<sub>4</sub>" Steel spindle</li> <li>2" Half spindle for fixed handle out/operating handle in</li> <li>2" Rosette screws</li> </ul> | <ul> <li>4 ½" Steel spindle</li> <li>2" Half spindle for fixed handle out/operating handle in</li> <li>2" Rosette screws for 1 ½" - 2" thick door</li> <li>2 ½" Rosette screws for 2 ½" - 2 ¾" thick door</li> </ul> | <ul> <li>5" Steel spindle</li> <li>2 ½" Half spindle for fixed handle out/operating handle in</li> <li>2 ½" Rosette screws for 2 ½" thick door</li> <li>3" Rosette screws for 2 ½" - 3" thick door</li> </ul> |

#### Charge for Re-Keying - \$3 (NET) per cylinder

Keying to Code

- Order by indicating "Key Code XXXXX " next to applicable locks

Keying Alike

- Order by indicating "Keyed Alike" next to applicable locks if only one keyed alike group is wanted

- If ordering multiple groups (houses) indicate "Keyed Alike House #\_" next to applicable locks

