

Thru-Bolt Mount with Decorative Caps



Appliance/Door pulls are drilled and tapped for 3/8"-16 thread to accommodate thread adapters. Fits standard door thickness of 1 3/4". Specify if thicker.


Supplied with:

- Two- Thread adapters for 1/4 -20 thread
- Two- 1/4 -20 Flat head machine screws x 1" long
- Two- Thread adapters for 10-32 thread
- Two- 10-32 Flat head machine screws x 1" long
- Two- 10-32 Flat head machine screws x 2" long
- Two- Threaded Washers
- Two- Decorative Caps

How To Order:

86442 US19
 Product Code Finish

Concealed Surface Mount (CS)

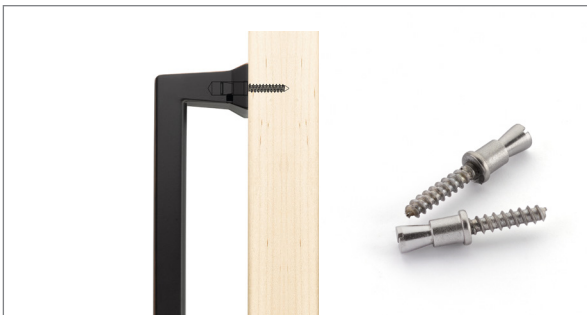

Most standard appliance pulls and door pulls are available with Concealed Surface mounting. Fits minimum door thickness of 1 1/4".


Supplied with:

- One grip with 3/8" diameter hole in the stem
- Two- #10, 1" bevel head wood screws
- Two- 1-32 set screws

How To Order:

CS 86442 US19
 Concealed Surface Mount Product Code Finish

Back to Back Mount (BTB)

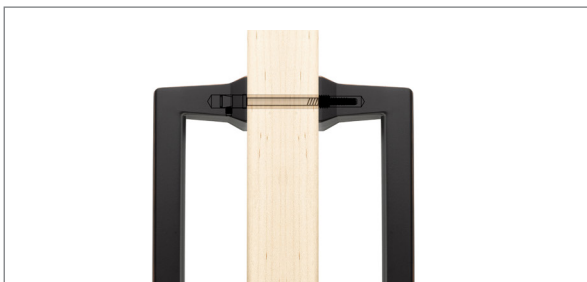

Most standard appliance pulls and door pulls are available with Back to Back mounting. Fits standard door thickness of 1 3/4". Specify if thicker.

Supplied with:

- One grip with 10-32 threads in the stem
- One mating grip with 3/8" diameter hole in the stem
- Two- 3/8" diameter bevel head screws with 10-32 shaft by 2 1/2" long
- Two- 10-32 set screws

How To Order:

BTB 86442 US19
 Back to Back Mount Product Code Finish